

CDC-0252-0350-1-ACB M1-R-STH-BB



Performance features

- + Can be used for openings for smoke exhaust, D+H Euro SHEV in accordance with EN 12101-2 and for daily ventilation
- + With BSY+ motor and synchronised electronics controlled via microprocessor
- + Low running noises thanks to the innovative acoustic decoupling of the drive components
- + Special side-hung vent bracket sets with compression springs for installation (included in scope of supply)
- + Available in all RAL colours
- + Can be used for virtually all window openings with an opening angle of up to 90°
- + Integrated ACB (Advanced Communication Bus) bus interface with Modbus RTU protocol
- + The drive is integrated directly via open bus communication through the ACB (Advanced Communication Bus), e.g. in a building management system

Approvals / Certificates

Details of approval on request.



5014068.16004

Technical data


CDC-0252-0350-1-ACB M1-R-STH-BB

Supply	24 V DC / $\pm 15\%$ / 0,6 A
Duty cycle	30 % (ON: 3 min. / OFF: 7 min.)
Force of pressure	250 N
Tensile force	250 N
Nominal locking force *	1500 N
Service life	20000 double strokes
Stroke	350 mm
Max. opening angle	Ventilation 45° SHEV 90°
Max. permissible force 45° opening	700 N
Max. permissible force 90° opening	200 N
OPEN running speed	6.7 mm/s
OPEN running speed - SHEV	9.4 mm/s
CLOSED running speed	5 mm/s
Type of protection	IP 32
Emission sound pressure level	LpA ≤ 35 dB(A)
Temperature range	-15 °C (-5 °C **) ... +75 °C
Fire resistance	B300 (30 min / 300 °C)
Housing	Aluminium
Surface	Powder-coated
Colour	White aluminium (~ RAL 9006)
Connection	2.5 m silicone cable
W x H x D	405 x 30 x 39 mm
Weight	1.1 kg
Remark	Right type
Art. No.	26.101.50


* Depending on the mounting, ** in accordance with VdS 2580

Dimensions

All specifications in mm

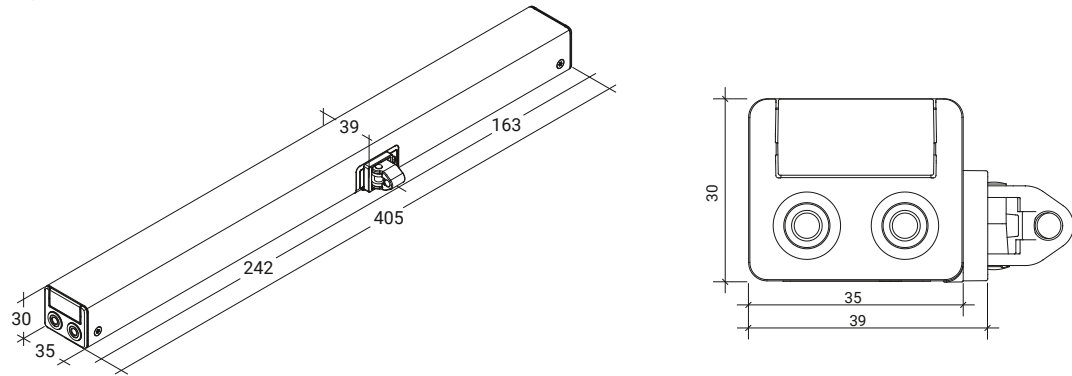

Pressure load diagram

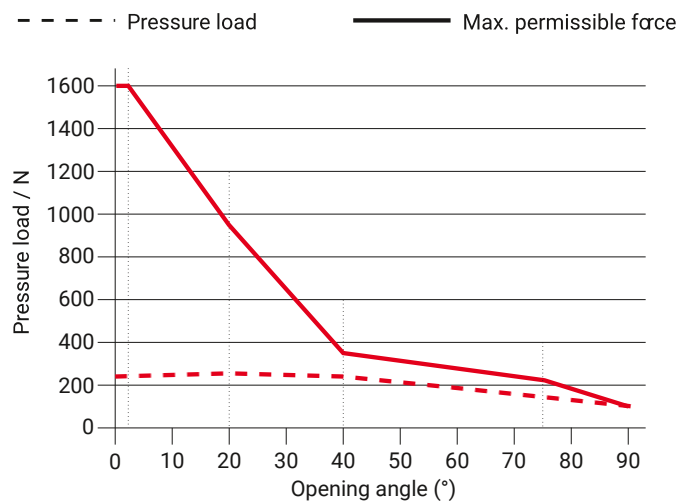

Possible applications

- + Integrated installation
- + Mounted installation
- + Frame mounting
- + Side-hung window

